


APPLICATIONS

- For unlocking or locking metal or wooden doors using low voltage wiring. For AC, use TA591 or TA592 transformer.

FEATURES

- **Mortise Type Remote Opener:** Reversible for right or left hand door. Use with mortise entrance locks having a latch bolt with up to 1/2" width and throw. 6" wire leads.
- **Rim Type Remote Opener:** Reversible for right or left hand door. Standard surface type used with lock latches with up to 5/8" width and throw. 6" wire leads.
- **Magnetic Switch Contacts:** For activating a variety of signals, ideal for limiting space applications. Self-insulating and can be mounted in any direction. All units include companion magnet. Dimensions: 23/16"L x 1/2"W x 1/2"D.
- **Door/Window Contacts, Rolling Ball Type:** Signals automatically with the opening and closing of doors, windows and transoms. Operates from pressure in any direction. Non-tilt, non-jamming design. Fits 3/4" hole; no need to mortise.
- **Electric Door Switch:** For turning lights/signals on or off when doors are opened or closed. Ideal for closets, dark rooms, storage areas of walk-in refrigeration. Rust resistant steel case with 4 knockouts, antique brass plate. Box dimensions: 1 1/4"W x 3 7/8"H x 2"D. Plate dimensions: 1 1/4"W x 4".
- **Door Trip Switch:** Signals automatically as door is openend. Commonly used on store doors to announce entrance of customers. Mounts on top of door frame. Solid cast brass. Size: 3 x 15/8".

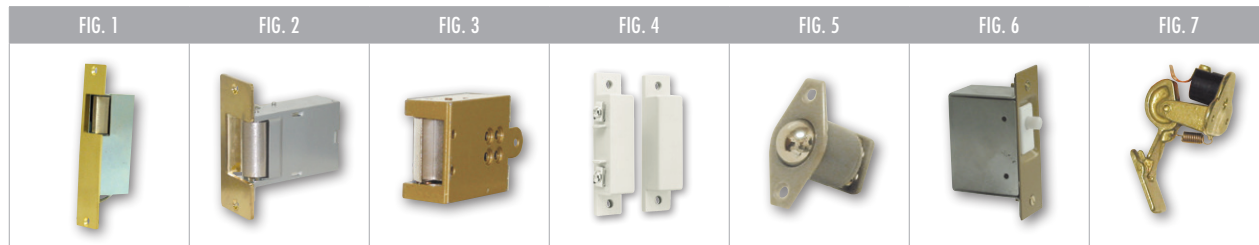

CAT NO.	FIG. NO.	TYPE	UPC CODE	DESCRIPTION	VOLTS	AMPS
TA09	1	Mortise type remote opener	96960	—	8-16VAC, 3-6VDC	.95-1.75, 1.25-1.80
TA154	2	Rim type remote opener	96962	—	16VAC, 3-6VDC	.95-1.75, 1.25-1.80
TA152	3	Rim type remote opener	96961	—	8-16VAC, 3-6VDC	—
TA60	4	Magnetic switch contacts	96975	Circuit closed with magnet engaged	—	—
TA61	4	Magnetic switch contacts	96976	Make & break NO and NC	24VAC, 12VDC	.5
TA62	4	Magnetic switch contacts	96977	Circuit open with magnet engaged	—	—
TA67W	4	Magnetic switch contacts	96979	Terminal Cover	—	—
TA44	5	Door/window contact, rolling ball type	96995	Normally closed Push to open	12-24V, AC/DC	2
TA45	5	Door/window contact, rolling ball type	96996	Normally open Push to close	12-24V, AC/DC	24
TA46	5	Door/window contact, rolling ball type	96997	Momentary contact Push to make & break	12-24V, AC/DC	24
TA502	6	Electric door switch	96964	Light ON when door is open	125VAC, 250VAC	6, 3
TA236	7	Door trip switch	96963	—	12-24VAC	2